
OpenOcean water.

Open Ocean Modular Water • Quencher Series

# QUENCHER
# 230 Volt AC

## Data Sheet

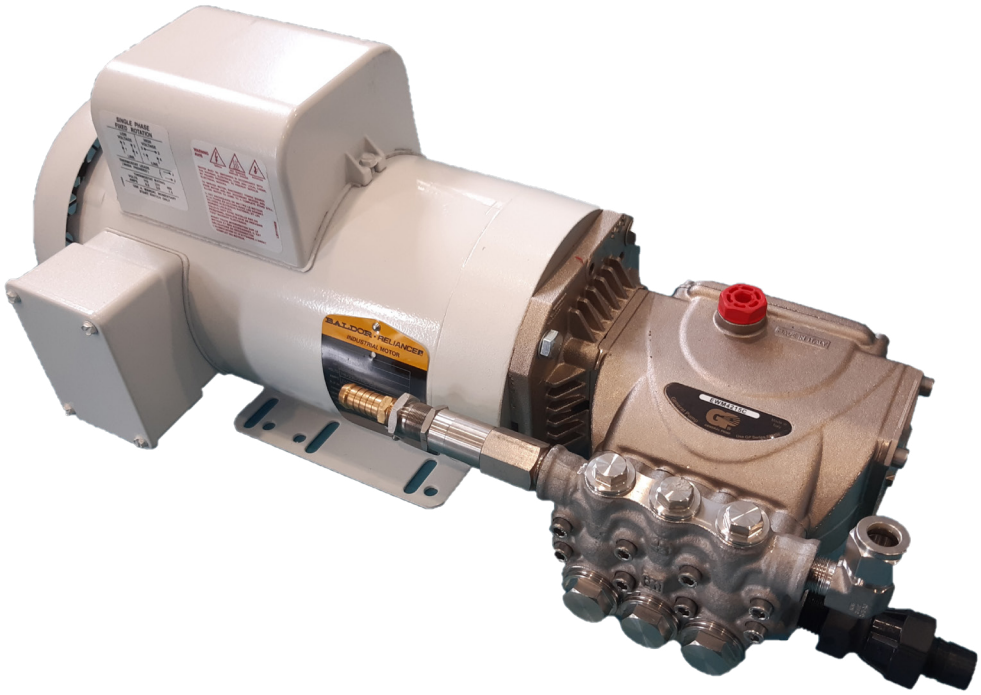


September 2026


**Phone** +64 21 167 6269
**Email** info@openoceanwater.com
**Website** openoceanwater.com


OpenOcean water.

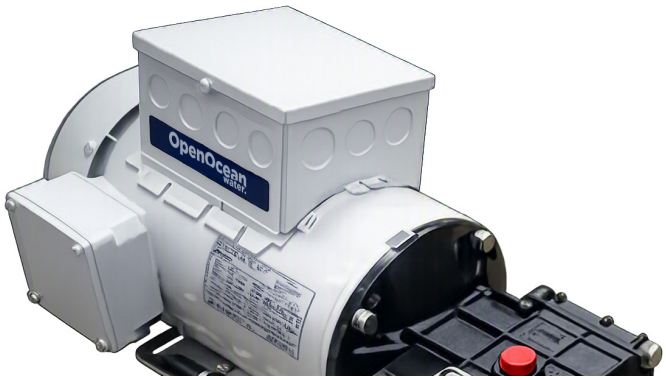


## 1. Data Sheet

The major components are assembled in modular form to best utilise your available space. These components are universal in nature and many of them are available worldwide, an important feature for a vessel operating internationally. Open Ocean keeps circuit boards, fancy controls and flashing lights off their products to provide the most reliable watermaker possible.

This reverse osmosis desalination plant utilises a commercial-grade high pressure pump, close coupled (no belts) to a 2.2 hp, 230 Volt AC electric motor. This supplies high pressure, pre-filtered sea water to a membrane array that produces a nominal 80–240 litres of potable water per hour from sea water at 25 degrees C and a salinity of 35,000 ppm, at an operating pressure of 800–850 psi.

## 2. Dimensions

- High pressure pump with electric motor 285mm wide x 560mm long x 255mm high
- Membrane vessel 90mm wide x 1190mm long
- Control panel 200mm wide x 165mm high
- Sample/tank valve panel 130mm wide x 75mm high
- Boost pump, 240V 290mm high x 390mm long x 195mm wide
- Sea water filters 400mm high x 320mm wide x 130mm deep
- Charcoal flush filter 400mm high x 370mm wide x 130mm deep

## 3. Options

### Autoflush

Automatically flushes fresh water through the system every 7 days, preserving the membranes — especially good for boaters who don't get back to their boats as often as they mean to.




### 20 Micron Pre-filter

For systems that will operate in water with high levels of organics. Filters out plankton and silt before it reaches the 5 micron pre-filter, extending its service life.




### Stand-offs


Our Quencher control panels are designed for discreet flush mounting, with electrical and wiring access from behind — a very tidy installation in the cabin. Where the best panel location doesn't allow access from behind, stainless steel stand-off brackets are available for both the control panel and the sample/tank valve, for easy surface mounting with hoses running from below.




### Specifications

- 230 Volt AC electric motor
- 80–240 litres per hour @ approx. 13 amps (one, two, or three membranes)
- Commercial quality reverse osmosis stainless steel high pressure pump
- Reverse osmosis membranes and 2000 psi carbon fibre pressure vessel(s)
- 5 micron polyester pleated washable pre-filter for cost-effective, long-life filtration
- Fresh water flush facility: charcoal filter connects to your onboard pressure water system to flush the watermaker with fresh water
- Pressure relief valve — protects components from accidental over-pressure situations
- Test, rejection and regulation valves
- High pressure hose / nylon non-corrosive tubing — can be cut and fitted aboard
- 230 Volt centrifugal sea water rated low pressure boost pump
- All you need to provide is a sea strainer, access to the ship's water tanks, low pressure hoses, and any mounting benches or surfaces required to position the Open Ocean components

## 4. Component Schematic

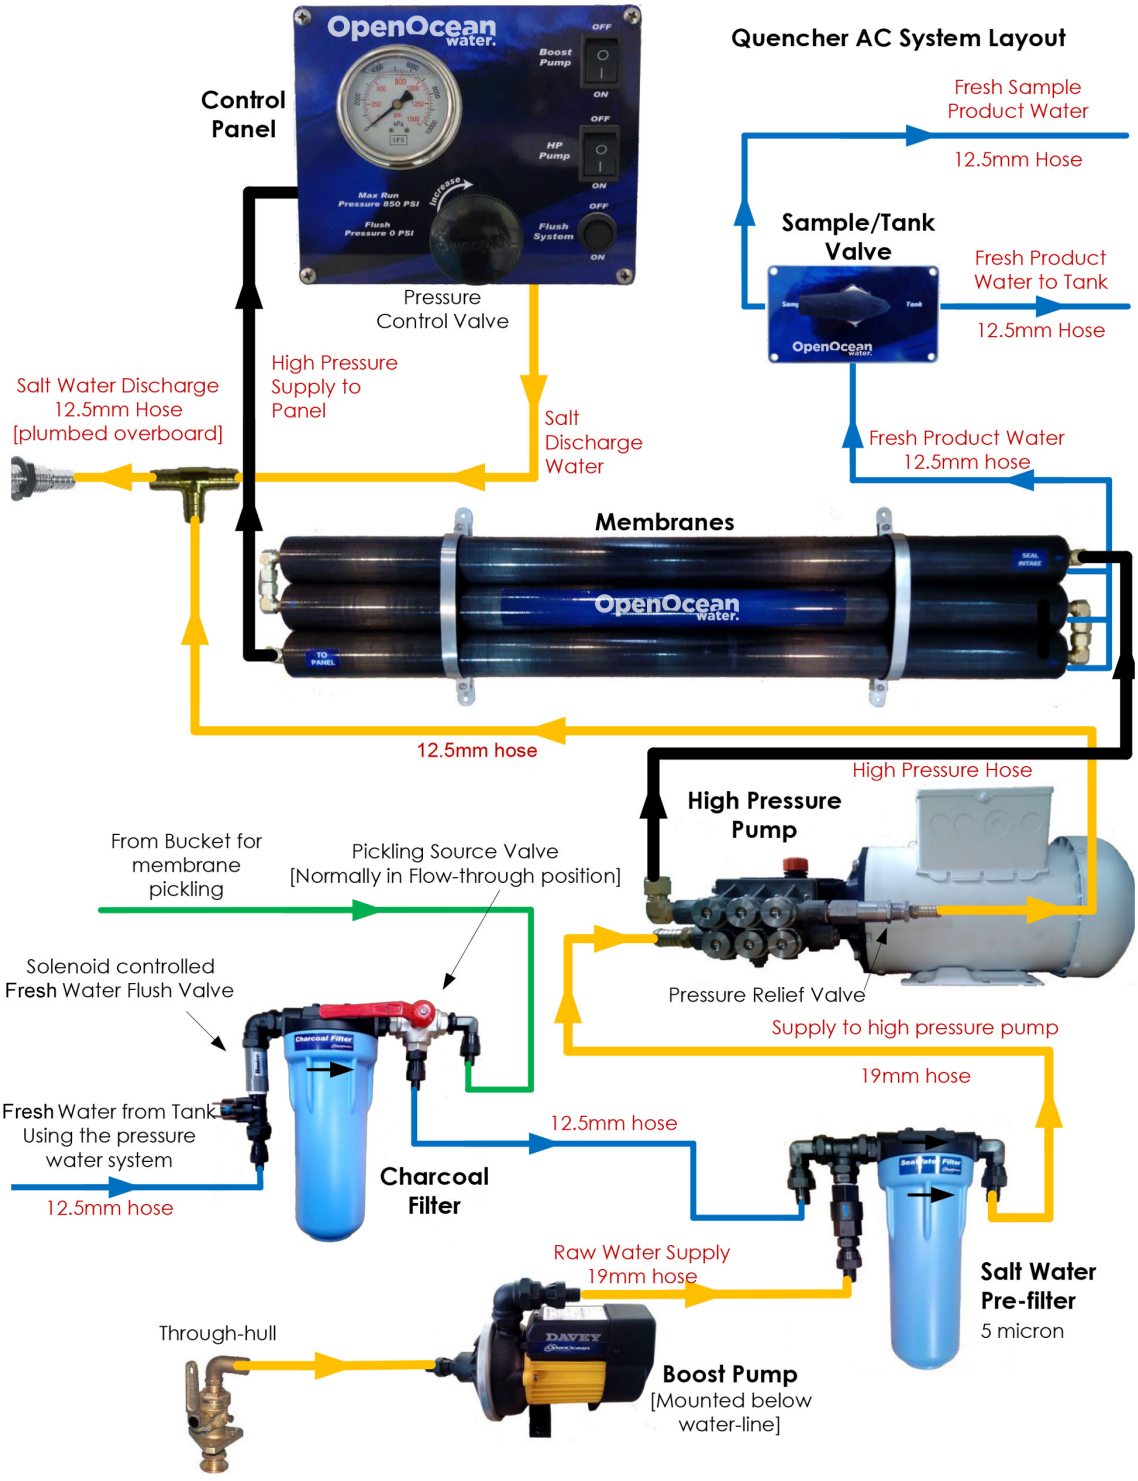


**Open Ocean Group Ltd**
8 Haszard Street, Waihi, New Zealand
Phone +64 21 167 6269
info@openoceanwater.com
openoceanwater.com